

## **Bind-it-All Wire Press Knob Repair Instructions**

Provided by Zutter Innovative Products

Tel: (949) 643-9526

E-mail- [BinditAll@aol.com](mailto:BinditAll@aol.com)

If the twist knob to your Bind-it-All wire press has broken, first contact Zutter Innovative Products at the contact information above so they can ship you a new part. Once you receive the part, follow the directions below. Color photos for each step are on Page 2.

Step # 1 – Remove the front knob by loosening the securing knob screw.

Step # 2 – Pull away the knob.

Step # 3 – Unscrew the broken part from the screw shaft.

Step # 4 – With a sharp tool, peel off/remove the aluminum plate cover.  
It is O.K. to damage it. You will be replacing it with a new one.

Step # 5 – Pull off aluminum plate entirely.

Step # 6 - Remove all 4 screws that are holding the broken front plate of unit.

Step # 7 – Once all screws have been removed, remove and discard the broken plate.

Step # 8 – Replace the new plate by screwing it onto to the screw shaft.

Step # 9 – Continue to screw in the new plate, about 1” inward.

Step # 10 – Again, screw in the front plate part about 1” inward.

Step # 11 – Place the front plate to match the mounting screw holes on your unit.

Step # 12 – Screw in all 4 screws

Step # 13 – Replace the new aluminum plate. Simply pull of adhesive wax paper.

Step # 14 – Press firmly on your replacement aluminum front plate.

Step # 15 – Replace your turn knob. Be sure to align the flat portion of the  
Screw shaft with the tightening screw on the knob.

Step # 16 - Tighten your screw knob to secure knob properly.

Step # 17 – Done! You are now a certified repair headquarters for Bind it All.

Step # 18 – If you still have problems please contact Zutter at the contact information above.




# 1



# 2



# 3

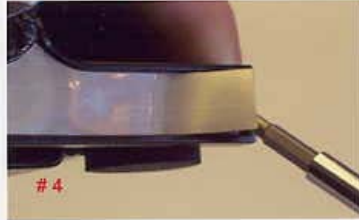

# 4



# 5



# 6




# 7



# 8



# 9

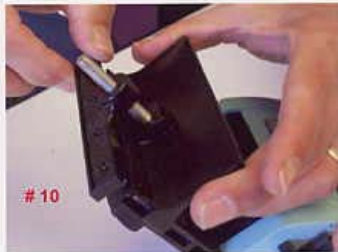

# 10



# 11



# 12



# 13



# 14



# 15



# 16



replacement parts